


TECHNICRETE

Palisade

Precast concrete security fencing

Technicrete Precast Concrete Palisade fencing is a high quality security system. The strength of the steel reinforced concrete elements ensure a high level of security is achieved. An open slat configuration also acts as a major deterrent as intruders are clearly visible. Technicrete Palisade Fencing: The first choice.

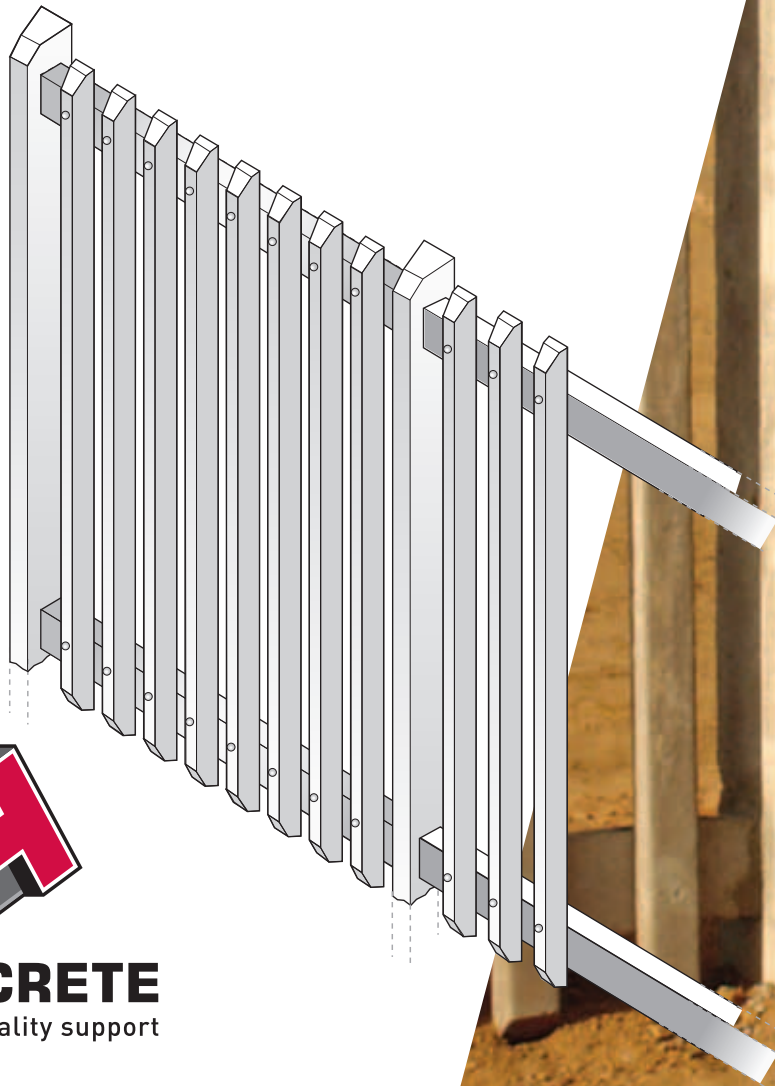

TECHNICRETE
quality support

CONCRETE ROOF TILES • EROSION PROTECTION BLOCKS • KERBS • MASONRY •
PAVING • **PRECAST PRODUCTS** • RETAINING WALLS • STOPE SUPPORT SYSTEMS

TECHNICRETE

Palisade pre-cast concrete fencing

• ASSEMBLY



Description	Standard Measurements (mm)	Reinforcing	Standard Fence height & Panel widths
Post	3000x140 / 80x230	4x8mm \varnothing Mild Steel	Fence: 2.4m
Beams	1940x150 / 140x65	4x6mm \varnothing Mild Steel	Panel: 2.0m
Pales	2370x95 / 80x60	3x6mm \varnothing Mild Steel	

Palisade Fence Erection:

- Excavate all the holes for the posts at 2000mm intervals (center to center. Each hole must have the following dimensions: - 400mm long x 400mm wide and 600mm deep.
- Place the end post plumb in the centre of the hole with the slots tapering down towards the base and the slots in the line of the fence, and fill the hole with concrete, ensuring that the post stays vertical while the concrete cures.
- Place the second post loose in the second hole.
- Place the bottom beam (1940mm long) in the lower slot of the first post and the lower slot of the second post.
- Place the second post plumb in the center of the second hole and fill the hole with concrete, ensuring that the post stays vertical while the concrete cures.
- Continue with items 3, 4 and 5 until all posts have been placed.
- Starting at the first two posts place the top beam in the upper slots in the posts, continuing until all top beams have been placed.
- Fix the pales to the beams with bolt, washer and nut, starting at the top beam, using M10-125mm bolts.

Technicrete reserves the right to change or amend the contents of this document at anytime without any notice with this document intended for general information only. Any specific information required about product specifications, applications, technical information, sales conditions, warranties and guarantees as required for any design or installation should be obtained from Technicrete.

CyberGraphics | Printed by Remia



Technicrete House
 Cnr. Main Reef Road & Houtkapper Street, Roodepoort, 1725
 Tel: 011 674 6900 – Fax: 011 672 1425
 Email: info@technicrete.co.za
www.technicrete.co.za
 0861 266267



A Murray & Roberts company

Branches:

Evander: 017 689-2100
Polokwane: 015 298-8083
Witbank: 013 696-1153