


TECHNICRETE

Ripplesett®

heavy duty traffic calming block

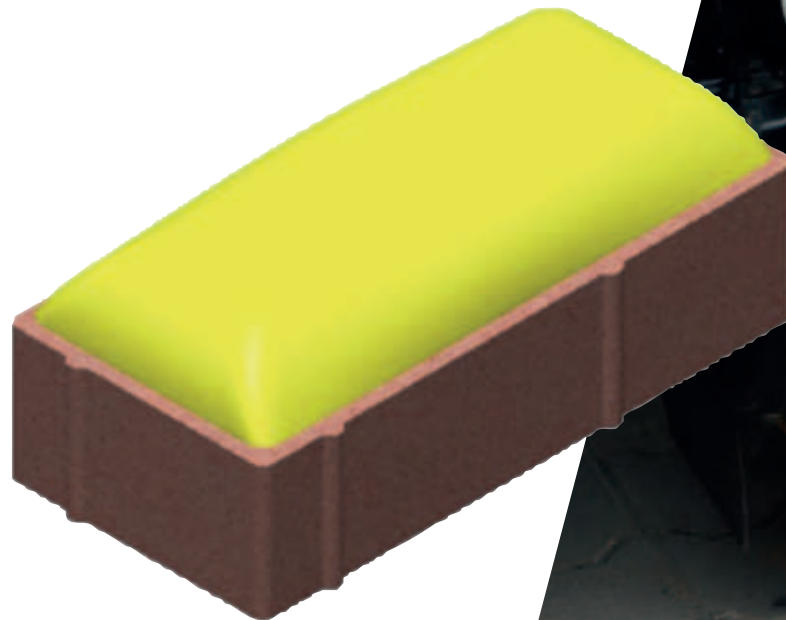

TECHNICRETE
quality support



CONCRETE ROOF TILES • EROSION PROTECTION BLOCKS • KERBS • RETAINING WALLS •
TRAFFIC CALMING BLOCK • PAVING • PREBAGGED PRODUCTS • MASONRY




TECHNICRETE




Ripplesett Block[®] heavy duty traffic calming block

• LAYING PATTERN

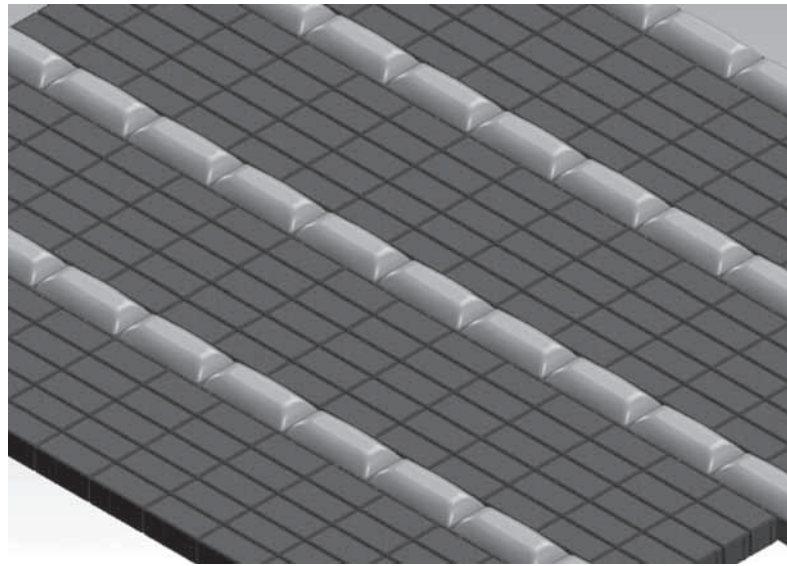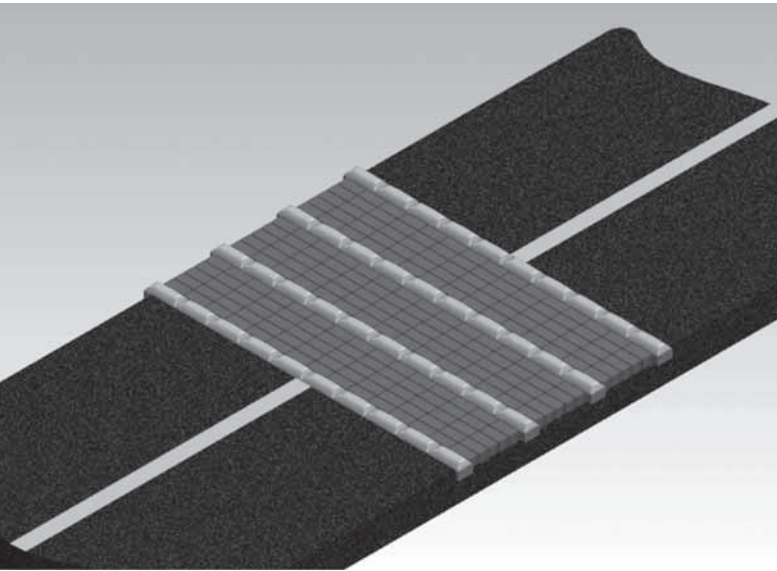

Ripplesett Blocks must be spaced 450mm-550mm apart to create the 'Drag' on a vehicle to reduce speeding. Motorists must be advised of this obstruction before they drive over this calming system.

Description	Nominal size	Dimensional tolerances	Nominal wearing face area	Spec. & test procedure	Surface finish
 <p>Type SC paving block with top surface contoured to limit traffic speeding with no vehicle damage</p>	310(L) x 150(W)mm 120mm thickness	Length & width = ± 3.5mm Thick = ± 5mm	Contoured – must be cut or capped (46500mm ²)	In accordance with this specification sheet concrete at a nominal 35 MPa. Top surface to be capped prior to soaking	Course for painting and abrasion resistance.

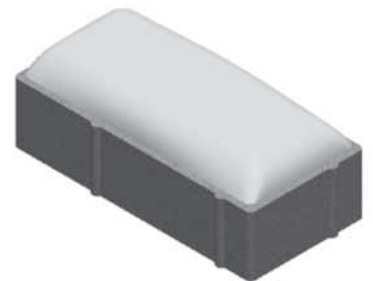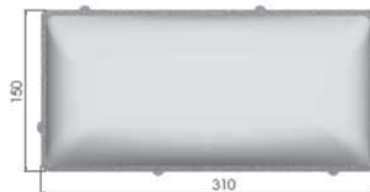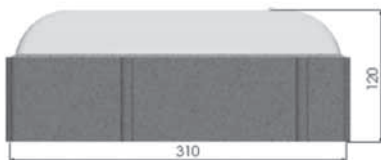

Technicrete reserves the right to change or amend the contents of this document at anytime without any notice with this document intended for general information only. Any specific information required about product specifications, applications, technical information, sales conditions, warranties and guarantees as required for any design or installation should be obtained from Technicrete.



TECHNICRETE
quality support

Technicrete House

Cnr. Main Reef Road & Houtkapper Street, Roodepoort, 1725
Tel: 011 674 6900 – Fax: 011 672 1425
Email: info@technicrete.co.za
www.technicrete.co.za
0861 266267



A Murray & Roberts company

Branches:

Carletonville: 018 790-4380
Evander: 017 689-2100
Stilfontein: 018 484-6234

White River: 013 750-0319
Olifantsfontein: 011 203-7700
Polokwane: 015 298-8083
Welkom: 057 391-4200
Witbank: 013 696-1153