


TECHNICRETE

Satin Pave

The smooth option

Technicrete Satin Pave pavers are non-bevelled interlocking paving blocks with a smooth, yet hard wearing, surface. The pavers are used in both heavy duty industrial areas and elegant shopping centres.

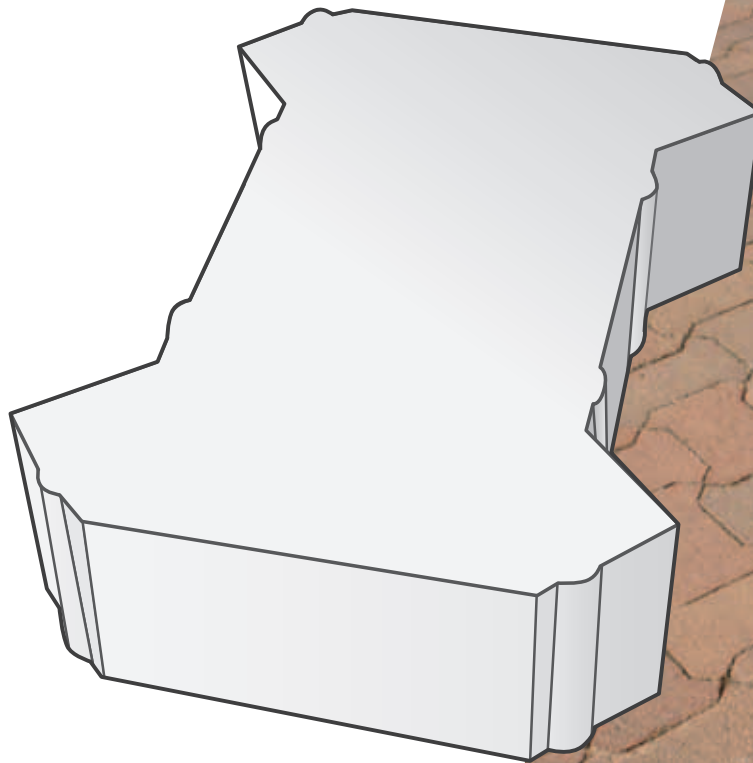

TECHNICRETE

quality support


CONCRETE ROOF TILES • EROSION PROTECTION BLOCKS • KERBS • MASONRY •
PAVING • PRECAST PRODUCTS • RETAINING WALLS • SLOPE SUPPORT SYSTEMS



TECHNICRETE

Satin Pave the smooth option

Colours shown on front may vary from the true colour due to the printing process.

General Application	Thickness Available	Length/Width	No. Blocks p/m ²	Colours available
 <p>Domestic driveways, shopping centres, pedestrian pavements, pathways & commercial developments.</p>	55mm	205/105	41	Autumn, Terracotta, Grey, Plum, Slate & Tan.
Registered Design	60mm	205/105	41	Autumn, Terracotta, Grey, Plum, Slate & Tan.
Petrol station forecourts, industrial and factory roads, suburban streets etc.	80mm	205/105	41	Autumn, Terracotta, Grey, Plum, Slate & Tan.



Please note the bedding and jointing sand should comply with SANS 1200MJ.

Technicrete reserves the right to change or amend the contents of this document at anytime without any notice with this document intended for general information only. Any specific information required about product specifications, applications, technical information, sales conditions, warranties and guarantees as required for any design or installation should be obtained from Technicrete.

Branches:

Carletonville: 018 790-4380
Evander: 017 689-2100
Stilfontein: 018 484-6234

White River: 013 758-1203
Olifantsfontein: 011 203-7700
Polokwane: 015 298-8083
Welkom: 057 391-4200
Witbank: 013 696-1153

BCT Rustenburg: 014 538-0818
Port Elizabeth: 041 372 2230