


TECHNICRETE

Armorflex HLP engineered hard lawn paving

• LAYING DETAIL

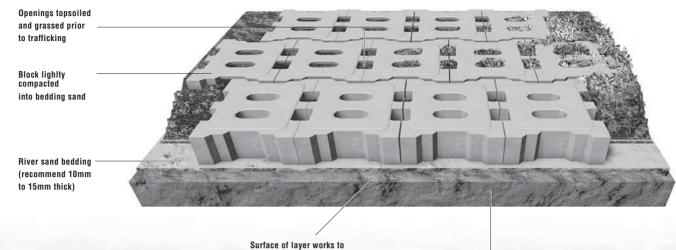

standard specifications SABS 1200 M.J. (max. 10mm in 3m)

Earthworks designed to suit traffic loading



Colours shown on front may vary from the true colour due to the printing process.

General	Thickness	Length/	No. Blocks	Block Mass	Colours
Application	Available	Width	p/m ²	p/m ²	available
Driveways, roadways, parking areas, embankment & light duty erosion control	90mm	340 x 294	11	13.3kg ave.	

Technicrete reserves the right to change or amend the contents of this document at anytime without any notice with this document intended for general information only. Any specific information required about product specifications, applications, technical information, sales conditions, warranties and guarantees as required for any design or installation should be obtained from Technicrete.



Technicrete House

Cnr. Main Reef Road & Houtkapper Street, Roodepoort, 1725 Tel: 011 674 6900 - Fax: 011 672 1425 Email: info@technicrete.co.za www.technicrete.co.za

0861 266 267

