
TECHNICRETE

Conleaf®



TECHNICRETE



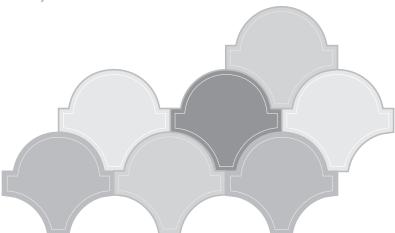

LAYING PATTERN



Colours shown on front may vary from the true colour due to the printing process.

TECHNICAL SPECIFICATIONS

General Application	Thickness Available	Length/ Wid	No. Blocks p/m ²	Colours available
Domestic driveways, municipal parking areas, pedestrian pavements, pathways & commercial developments.	55mm	200 x 200	42	Autumn, Terracotta, Grey, Plum, Slate & Tan.
	60mm	200 x 200	42	Autumn, Terracotta, Grey, Plum, Slate & Tan.
Petrol station forecourts, industrial and factory roads, suburban streets etc.	80mm (on request only)	200 x 200	42	Autumn, Terracotta, Grey, Plum, Slate & Tan.

Please note the bedding and jointing sand should comply with SANS 1200MJ.

Technicrete reserves the right to change or amend the contents of this document at anytime without any notice with this document intended for general information only. Any specific information required about product specifications, applications, technical information, sales conditions, warranties and guarantees as required for any design or installation should be obtained from Technicrete.



Technicrete House

Cnr. Main Reef Road & Houtkapper Street, Roodepoort, 1725 Tel: 011 674 6900 - Fax: 011 672 1425 Email: info@technicrete.co.za www.technicrete.co.za 0861 266 267

