


TECHNICRETE

Satin Pave

The smooth option

Technicrete Satin Pave pavers are non-bevelled interlocking paving blocks with a smooth, yet hard wearing, surface. The pavers are used in both heavy duty industrial areas and elegant shopping centres.

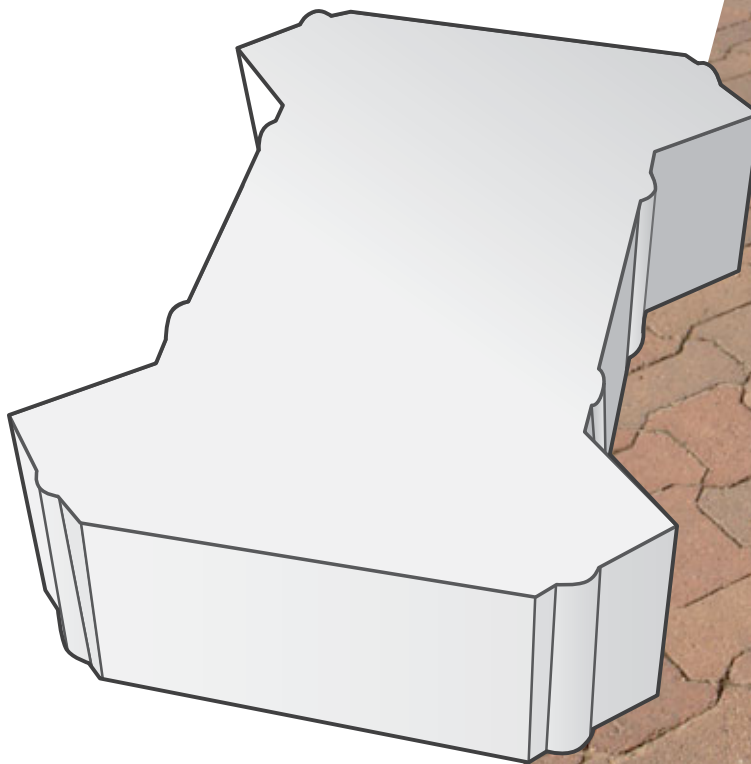

TECHNICRETE
quality support


PAVING • KERBS • EROSION PROTECTION • RETAINING WALLS • MASONRY • HEAVY DUTY PAVEMENTS
• MINING • SHOTCRETES • PREBAGGED PRODUCTS • STOPE SUPPORT SYSTEMS



TECHNICRETE

Satin Pave the smooth option

Colours shown on front may vary from the true colour due to the printing process.

General Application	Thickness Available	Length/Width	No. Blocks p/m ²	Colours available
 <p>Domestic driveways, shopping centres, pedestrian pavements, pathways & commercial developments.</p>	55mm	205/105	41	Autumn, Terracotta, Grey, Plum, Slate & Tan.
Registered Design	60mm	205/105	41	Autumn, Terracotta, Grey, Plum, Slate & Tan.
Petrol station forecourts, industrial and factory roads, suburban streets etc.	80mm	205/105	41	Autumn, Terracotta, Grey, Plum, Slate & Tan.



Please note the bedding and jointing sand should comply with SANS 1200MJ.

Technicrete reserves the right to change or amend the contents of this document at anytime without any notice with this document intended for general information only. Any specific information required about product specifications, applications, technical information, sales conditions, warranties and guarantees as required for any design or installation should be obtained from Technicrete.



TECHNICRETE
quality support

Technicrete House

Cnr. Main Reef Road & Houtkapper Street, Roodepoort, 1725
Tel: 011 674 6900 – Fax: 011 672 1425
Email: info@technicrete.co.za
www.technicrete.co.za
0861 266 267



Branches:

Gauteng: Olifantsfontein 011 206 8920
Clayville 011 316 2375
Carletonville 087 354 8620

Mpumalanga: Witbank 013 696 1153
North West: Stillfontein 010 005 1702
Limpopo: Polokwane 015 293 2082
Free State: Welkom 057 391 4200